



13.56 MHz, 1500 / 2500 / 5000 W RF Generator

Synertia® RFG

Synertia®, Comet's integrated RF Power Delivery Platform, enables the unprecedented power delivery control required by plasma process tools for the next generation of microchips.

Synertia® is the RF Power System that ensures powerful command and control of plasma conditions at the highest speeds. It manages the complexities of multi-layer next-generation memory and atomic-scale plasma processes.

In Synertia®, the Generator and Matching Network controls interact at extremely fast speed, creating a powerful synergy. Synertia® RFG is able to react in microseconds to data it receives from the Matching Network. Users fully control the unique performance accelerators of Synertia® RFG, including repeatability, multi-level pulsing and high-speed communication. This responsiveness provides actionable insights and enables more complex plasma applications than have ever been possible before: a new level of deep control.

Features

- Power accuracy and repeatability
- Multi-level pulsing (four user definable levels)
- Customizable frequency tuning
- Digital metrology and intuitive graphical user interface
- Digital system control for advanced manufacturing technologies

Benefits

- Seamless integration into process systems
- Ultra-fast plasma process control
- Tighter repeatability delivers improved yield
- Fast configurable rise/fall time of pulsing
- Consistent process and wafer level uniformity



Synertia® RFG 15/13 and 50/13

Synertia RFG 15/13 Synertia RFG 50/13

Frequency	13.56 MHz	
Frequency stability and accuracy	± 25 ppm	
Output power	1.5 W to 1500 W	5 W to 5000 W
RF accuracy into 50 Ω	± 1 % of setpoint or ± 0.3 W whichever is greater	± 1 % of setpoint or ± 1 W whichever is greater
Spurious and harmonics		
Harmonics into 50 Ω	- 40 dBc	
Spurious into 50 Ω	- 50 dBc	
RF pulsing		
Pulse rate	0.01 Hz to 100 kHz	
Pulse rise/fall time	300 ns	150 ns
Multilevel pulsing	up to 4 individual levels	
Options		
CEX	Master or slave ± 10 % of nominal frequency	
Frequency tuning	within ± 10 % of nominal frequency	
Arc management	various detection and management options	
Interfaces	EtherCAT, RS-232, RS-485, analog (ProfiNet, DeviceNet etc.)	
Power rating and coolant requirements		
A/C input	208 VAC to 240 VAC, 1-, ±10 % tolerant	200/400/480 VAC, 3-, ±10 % tolerant
AC to RF efficiency	typically 73 %	
Operating temperature	+5 °C to +35 °C	+5 °C to +40 °C
Cooling	Forced air	Water-cooled
Configuration		
Form factor	3U, 19" half-rack	
Dimensions excl. connectors (w x h x d)	216 x 129 x 461 mm	216 x 129 x 608 mm
Weight	< 14 kg	< 24 kg
RF output connector types	default: N-type optional: HN, 7/16 (QRM, QDS on demand)	default: 7/16 optional: HN, LC, SQS (QRM on demand)
Compliance		
Applicable compliance directives and industrial standards	2014 / 35 / EU low voltage directive 2014 / 30 / EU EMC directive RoHS 2011/65/EU and 2015/863/EU EN 55011, EN 61000-3-2 (RFG 15/13), EN 61000-3-3, EN 61000-6-2, EN 61010-1, EN 61326-1, SEMI S2, S8, S14, S22, F47, ISTA 1G, ISTA 3A	

Switzerland (Head Office)

Comet AG
Flamatt

Germany

XYLON International GmbH
Aachen

United States

Comet Technologies USA, Inc.
San Jose/CA

China

Comet Mechanical Equipment
(Shanghai) Co. Ltd., Shanghai

Korea

Comet Technologies
Korea Co., Ltd., Suwon-si

Malaysia

Comet Technologies
Malaysia Sdn Bhd, Penang

Taiwan


Comet Solutions Taiwan Ltd.
Hsinchu

pct.comet.tech
pct@comet.tech


Specifications are subject to change without notice.
Comet can not be made responsible for errors or omissions.

Advanced Multilevel Pulsing

- Up to four individual levels
- Edge shaping per level 0.3 – 200 μs
- Internal and external sequence trigger

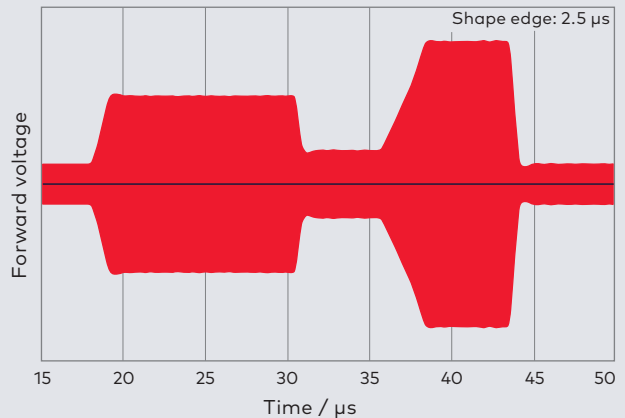

Repeatability

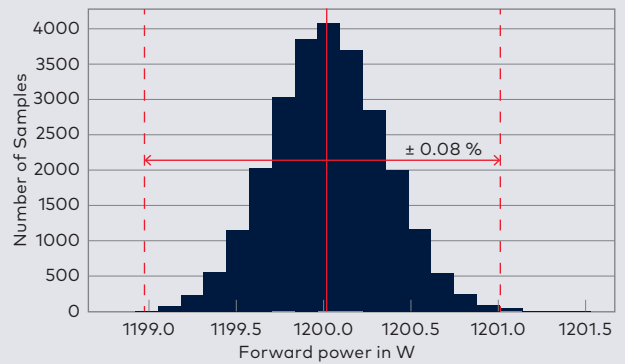

Power delivery distribution from 25,000 cycles

Adaptive graphical user interface

- Web-based – no special software required
- Advanced oscilloscope functions for direct access to crucial process parameters

User-configurable display

